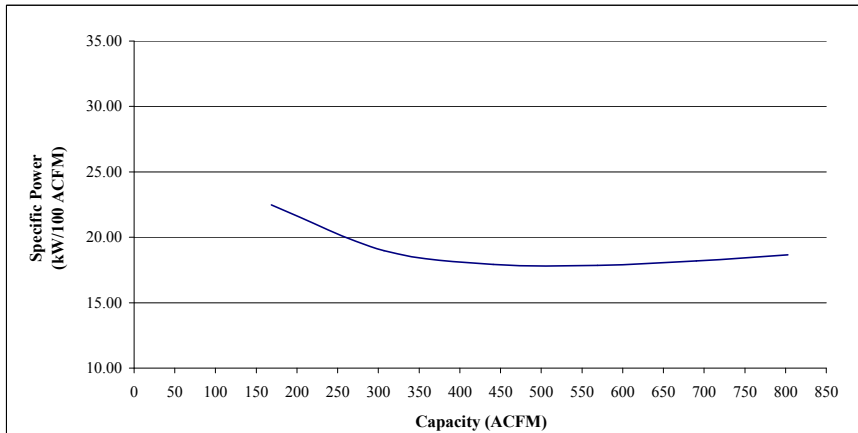


COMPRESSOR DATA SHEET

Rotary Screw Variable Frequency Drive Compressor

MODEL DATA - FOR COMPRESSED AIR

1	Manufacturer: CompAir		
2	Model Number: L132RS - 100psig		Date: 5/31/10
	<input checked="" type="checkbox"/> Air-cooled	<input type="checkbox"/> Water-cooled	# of Stages: 1
<input checked="" type="checkbox"/> Oil-injected	<input type="checkbox"/> Oil-free		
3	Rated Operating Pressure	100	psig ^b
4	Drive Motor Nameplate Rating	180	hp
5	Drive Motor Nameplate Efficiency	94.5	percent
6	Fan Motor Nameplate Rating (if applicable)	8.5	hp
7	Fan Motor Nameplate Efficiency	80.5	percent
8	Input Power (kW)	Capacity (acfm) ^{a,d}	Specific Power (kW/100 acfm) ^d
	149.8	802.8	18.65
	125.7	690.5	18.20
	101.6	569.0	17.85
	79.1	441.1	17.93
	58.3	306.8	18.99
	37.9	168.5	22.47
9	Total Package Input Power at Zero Flow ^c	14.3	kW
10	 <p style="text-align: center; font-size: small;">Note: Graph is only a visual representation of the data in Section 9</p>		

- NOTES:
- a. Measured at the discharge terminal point of the compressor package in accordance with Annex E to ISO 1217; acfm is actual cubic feet per minute at inlet conditions.
 - b. The operating pressure at which the Capacity and Electrical Consumption were measured for this data sheet.
 - c. No Load Power. In accordance with ISO 1217, Annex E, if measurement of no load power equals less than 1%, manufacturer may state "not significant" or "0" on the test report.
 - d. Tolerance is specified in Annex E to ISO 1217 as follows:
NOTE: The terms "power" and "energy" are synonymous for purposes of this document

Member:



Volume Flow Rate at specified conditions		Volume Flow Rate	Specific Energy
m^3/min	ft^3/min	%	%
Below 0.5	Below 15	+/- 7	+/- 8
0.5 to 1.5	15 to 50	+/- 6	+/- 7
1.5 to 15	50 to 500	+/- 5	+/- 6
Above 15	Above 500	+/- 4	+/- 5